

基本特性 FEATURES

1. MGS-02P 系列疊加式雙段減壓閥可使用於 P 孔減壓, 在同一迴路中可變換高壓和低壓兩種功能
MGS-02P series modular two section pressure reducing valve can be used to reduce pressure on the "P" port. It has the function of changeover between high and low pressure within the same circuit.
2. 最大使用流量 Max. operated flow: 40LPM(10.56GPM)
3. 最大使用壓力 Max. operated pressure: 70 bar(1000 psi)
4. 重量 Weight: 5.9 Kgs

型號說明 HOW TO ORDER

MGS - 02 P - 1 - *** - 20 - K
① ② ③ ④ ⑤ ⑥ ⑦

① 產品系列 Valve series

MGS= 疊加式雙段減壓閥 Modular two section pressure reducing valve

② 油路板安裝型式通稱 Gasket mounting

Nominal 1/4" (6mm)


ISO= CETOP3

DIN= NG6

NFPA= D03

③ 控制迴路 Control port

P = P port only

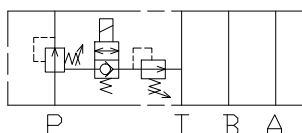

④ 壓力調整範圍 Adjustment pressure

0 = 2-35 bar (28-500 psi)

1 = 5-70 bar (70-1000 psi)

⑤ 線圈型式 Coil voltage

A110 = AC110V-60Hz; AC100V-50Hz

A120 = AC120V-60Hz; AC110V-50Hz

A220 = AC220V-60Hz; AC200V-50Hz

A240 = AC240V-60Hz; AC220V-50Hz

D12 = DC12V

D24 = DC24V

⑥ 設計型號 Design number


⑦ 調整桿型式 Adjustment

省略 = 內六角調整 Omit=Hex. screw with nut


K = 旋鈕調整 Knob

外型尺寸 DIMENSIONS

MGS-02P-**-***-20-K

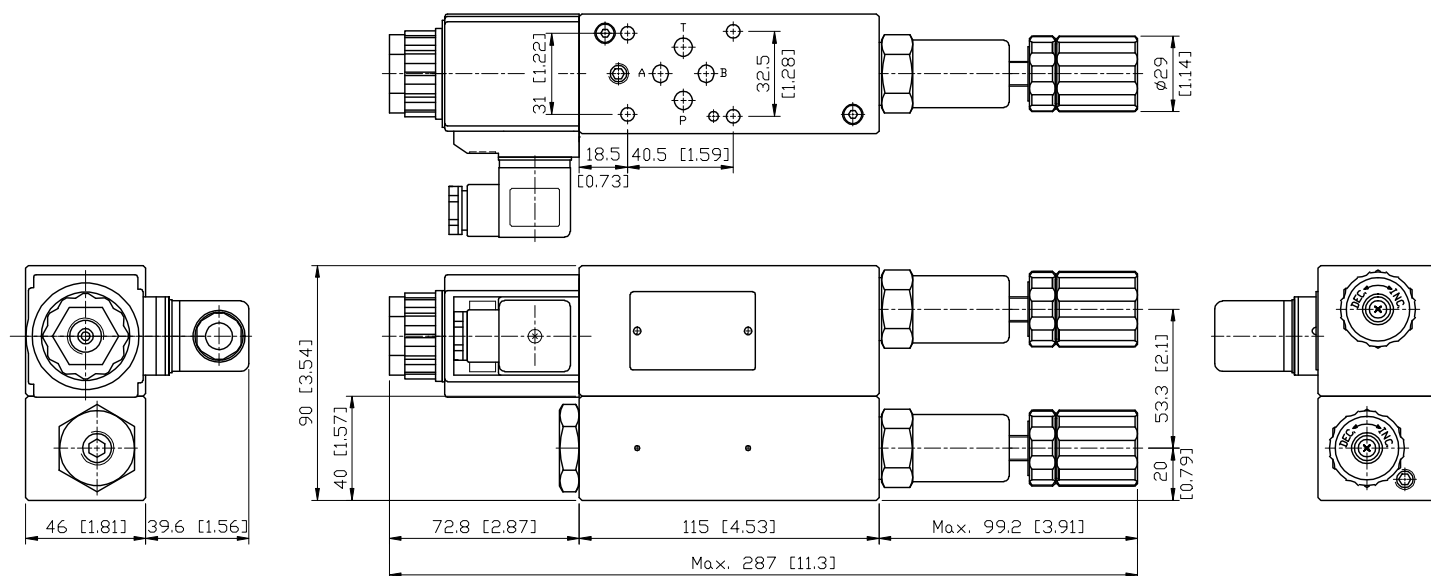

MGS-02P-**-***-20

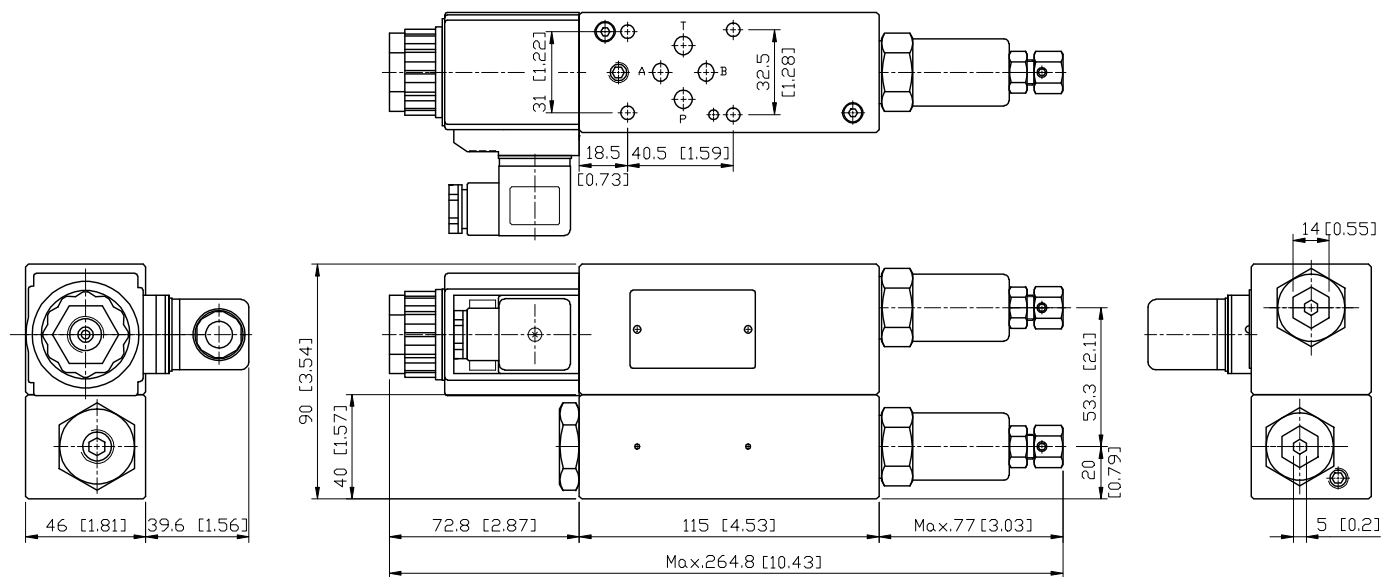

安裝面 MOUNTING INTERFACE

Unit: mm [inch]

ISO 4401-AB-03-4-A

