
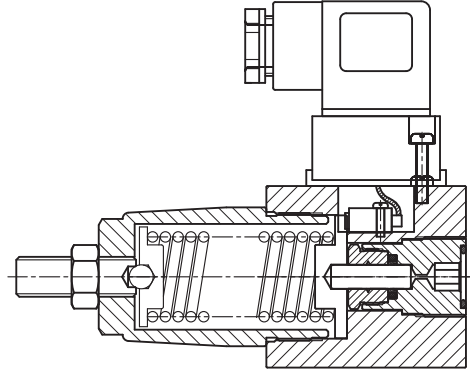


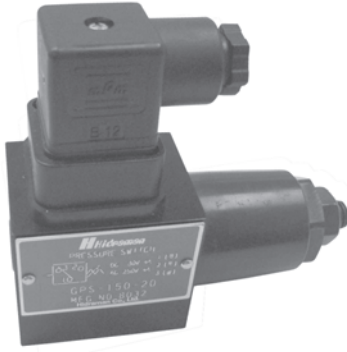

基本規格 SPECIFICATIONS

GPS&TPS系列 SERIES		
最大耐壓 Max. Overpressure	bar	600 bar (8571 PSI)
重現性 Repetition Accuracy	%	± 1%
觸點負載 Contaction Load	A	250 VAC (交流) 3A (安培)
		30 VDC (直流) 4A (安培)
切換頻率 Change Over Frequency		60 Operations / min (每分鐘60次)
保護規範 Protection		IP65 DIN40050
使用油品 Fluid Type		礦物性 耐磨性 Mineral, Anti-Wear
黏度範圍 Viscosity	cST	10-400 cST (59-1854 SSU)
使用溫度 Operating Temperature	°C	-15-70°C (-5-158°F)
清潔度 Contamination Level		NAS 12級以內 Under NAS Class 12
重量 Weight	Kgs	0.75 Kgs (1.65 Lbs)

型號說明 HOW TO ORDER

GPS - 35 - 20 - K

① ② ③ ④

① 閥系列 Valve Series

GPS = 板式壓力開關 Sub-Plate Mounting Pressure Switch

TPS = 管式壓力開關 Threaded Connections Pressure Switch

② 調壓範圍 Pressure Adjusting Range

35 = 5-35 bar (71-5000 PSI)

70 = 10-70 bar (140-1000 PSI)

150 = 30-150 bar (420-2200 PSI)

230 = 50-230 bar (700-3300 PSI)

420 = 90-420 bar (1300-6000 PSI)


③ 設計型號 Design No.

④ 調整桿型式 Adjustment

省略 = 內六角調整 Omit = Hex. Screw With Nut


K = 旋鈕調整 Knob

迴路符號 SYMBOLS




外型尺寸 DIMENSIONS

GPS-*-20

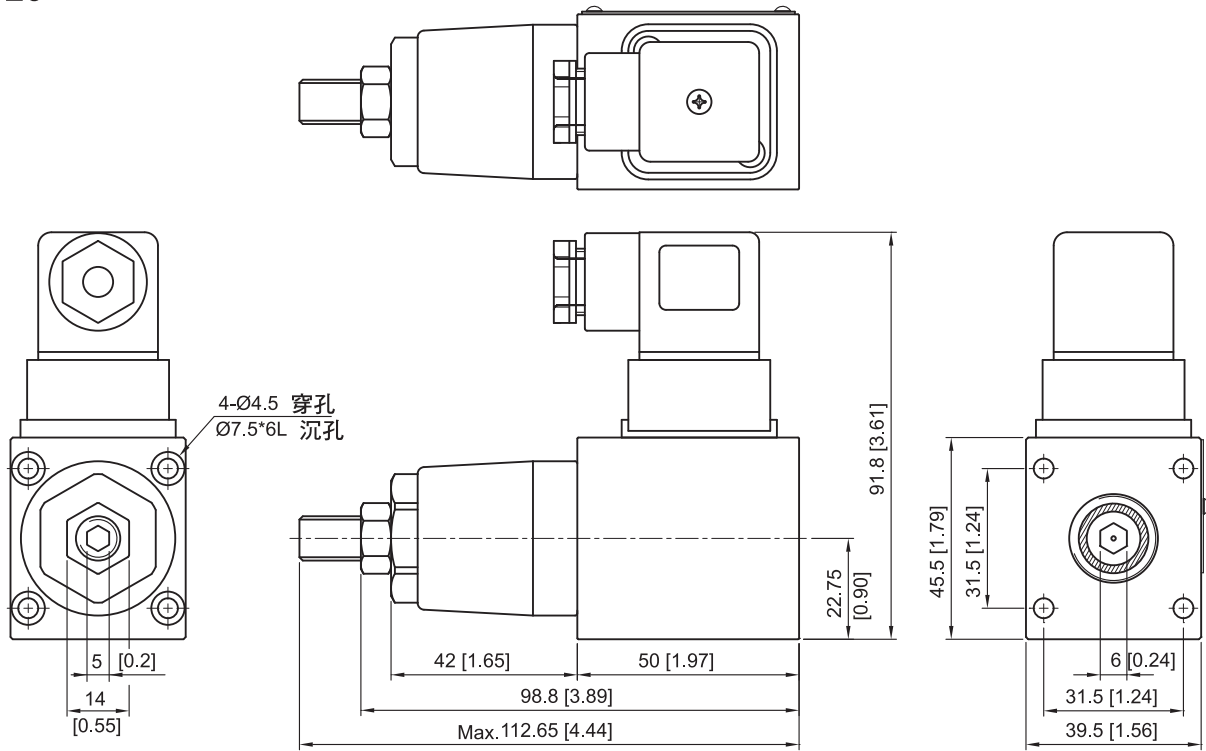


GPS-*-20-K

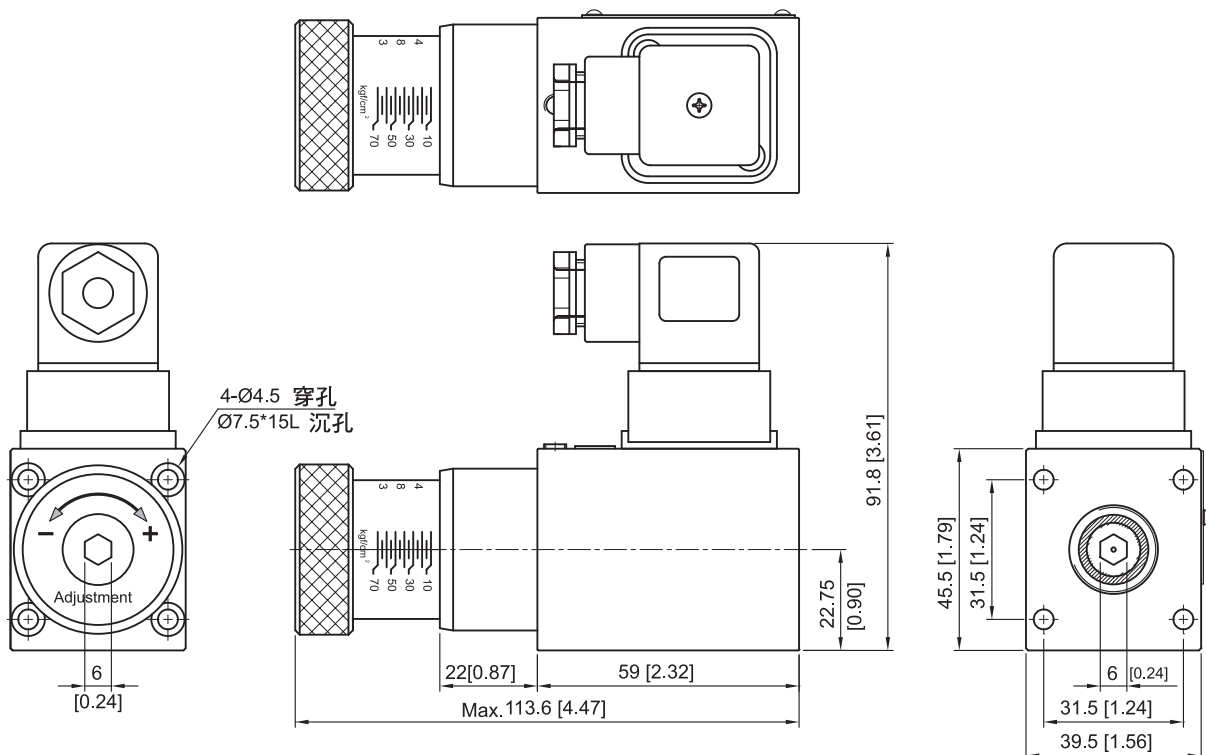


外型尺寸 DIMENSIONS

TPS-*-20

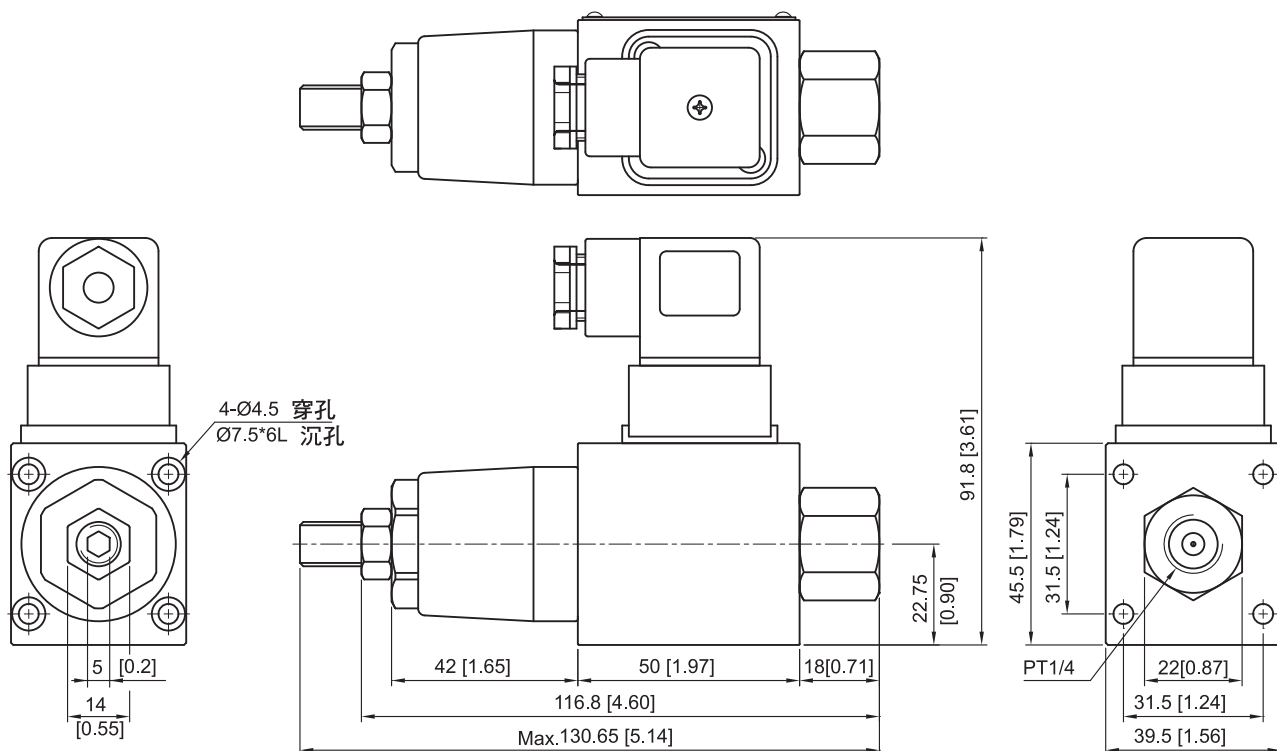


TPS-*-20-K

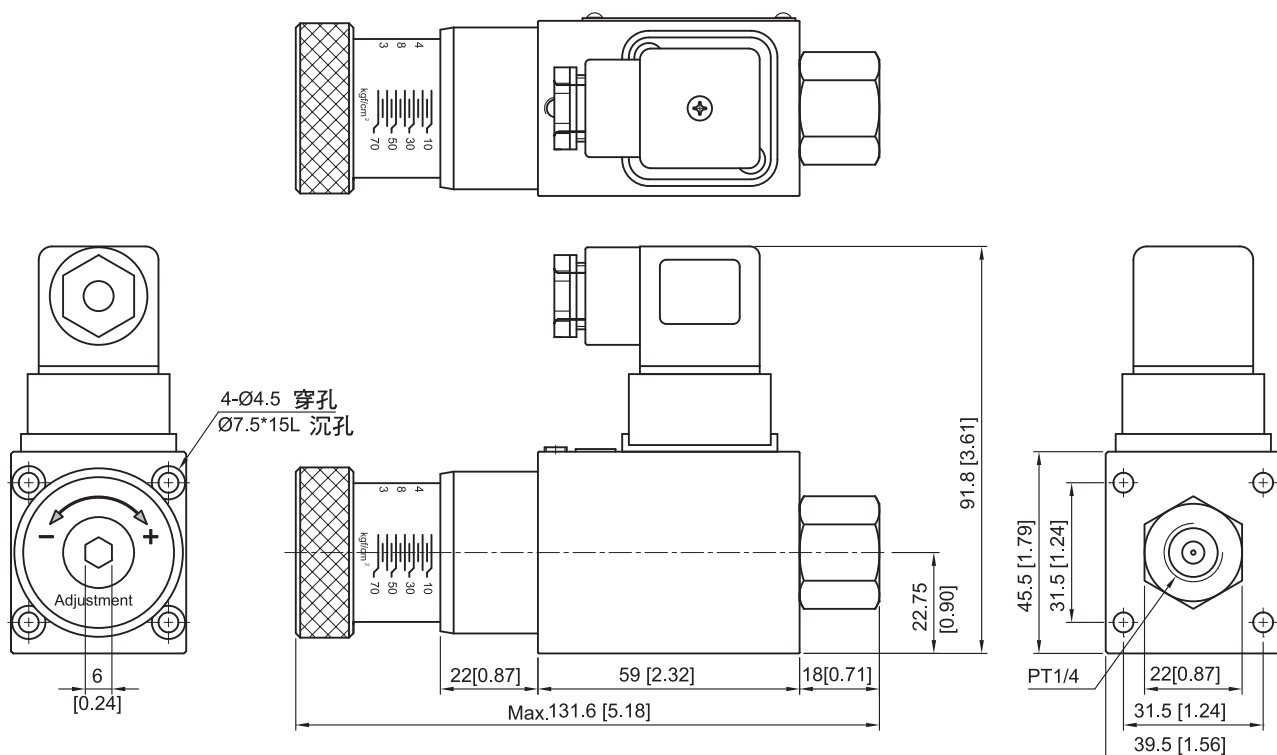


密封件 SEAL KITS

GPS-*-20

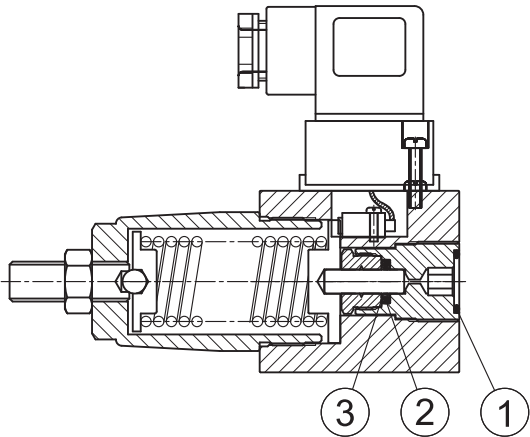


GPS-*-20-K

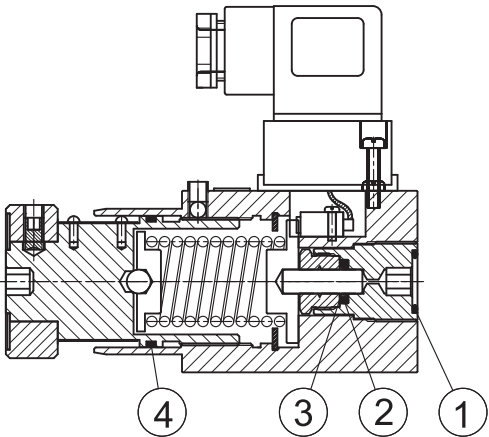


NO.	種類 Description	型號 Specification	數量 Q'ty	
			GPS-*-20	GPS-*-20-K
1	O 型環 O-ring	AS568-014 HS90°	1	1
2	O 型環 O-ring	AS568-011 HS70°	1	1
3	Stepseal-K	RS1300060-T46	1	1
4	O 型環 O-ring	AS568-023 HS70°	0	1

TPS-*-20

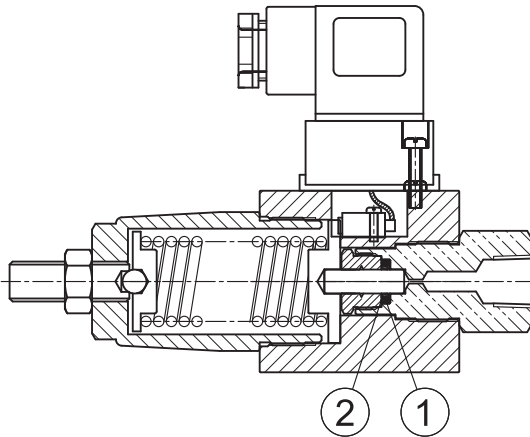

TPS-*-20-K

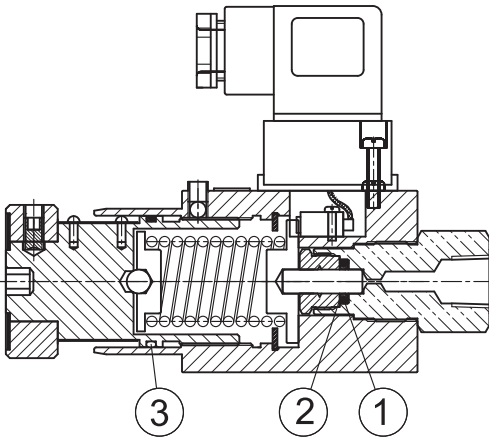

NO.	種類 Description	型號 Specification	數量 Q'ty	
			TPS-*-20	TPS-*-20-K
1	O 型環 O-ring	AS568-011 HS70°	1	1
2	Stepseal-K	RS1300060-T46	1	1
3	O 型環 O-ring	AS568-023 HS70°	0	1